



---

# HUMIDITY TEST CHAMBERS



# Humidity test chambers

Series KBF-S ECO Solid.Line	Page 6
Series KBF	Page 14
Series KBF PRO	Page 24

BINDER constant climate chambers offer precise and reliable climate control for a wide range of applications. The double-sided airflow ensures uniform temperature and humidity distribution - even when fully loaded. The KBF series (0 °C to +70 °C, 10-80 % r.H.) is ideal for stability tests in accordance with ICH-Q1A. The energy-efficient KBF-S ECO saves up to 75 % electricity thanks to Peltier technology. The KBF PRO series enables demanding material tests (-20 °C to +100 °C, 10-98 % r.h.). Supplemented with ICH light modules, photostability tests can be carried out.



## ADVANTAGES AT A GLANCE




### SAFE AND POWERFUL

KBF PRO with a wide temperature range from -20 °C to +100 °C for demanding tests.



### UNLIMITED FLEXIBILITY

Wide range of applications thanks to large product portfolio with compressor or Peltier units, as table-top or floor-standing units up to 1600 L. The humidity test chambers can be individually adapted to requirements with a wide range of accessories.

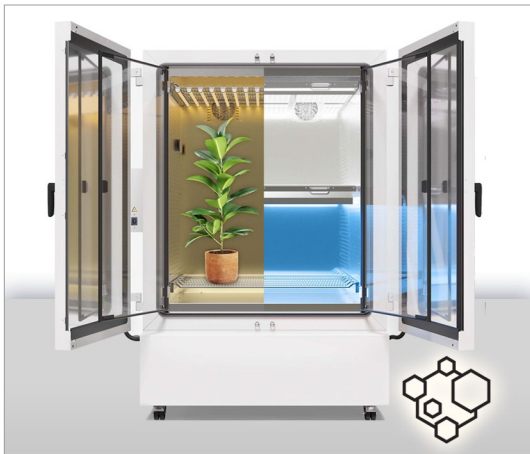

### MODULARITY THAT GROWS WITH YOU

#### KBF, KBF PRO

Modular equipment options, such as light modules, can be retrofitted at any time. Light modules turn the climate chamber into a photostability test chamber or plant growth chamber.



### NEW STANDARDS IN ENERGY EFFICIENCY

Exemplary environmental friendliness thanks to maximum energy efficiency and avoidance of climate-damaging refrigerants.

## Series KBF-S ECO Solid.Line | with environmentally friendly thermoelectric cooling

Thanks to thermoelectric cooling technology with patented heat dissipation, the new KBF-S ECO climatic chamber is one of the most energy-efficient constant climate chambers on the market. The thermoelectric cooling technology means the KBF-S ECO series is also very quiet during operation.



Model 720, Model 720

### BENEFITS

- Safe thanks to standard-compliant testing according to the ICH Q1A guideline, even with full load.
- Reliable thanks to failsafe operation without compromise.
- Smart, as a wide range of accessories makes it highly compatible for adaptation to specific customer requirements.
- Economical, as energy consumption is minimal thanks to optimized thermoelectric cooling.





### IMPORTANT CHARACTERISTICS

- Temperature range: 0 °C to +70 °C (max. 28 °C under ambient temperature)
- Humidity range: 10% to 80% RH
- APT.line™ preheating chamber technology
- Independent water supply via tank
- LCD to display temperature and humidity along with additional information and alarms
- Internal data logger, measured values can be read out in open format via USB
- Unit self-test for comprehensive status analysis
- Inner chamber made completely of stainless steel
- 2 stainless steel racks
- Access port with silicone plug Ø 30 mm, left
- Computer interface: Ethernet

### AVAILABLE SIZES

Designation	Interior volume (cu.ft)	Online data sheets
KBF-S ECO 240	9	> <a href="https://go2binder.com/us-KBF-S-ECO240">go2binder.com/us-KBF-S-ECO240</a>
KBF-S ECO 400	14	> <a href="https://go2binder.com/us-KBF-S-ECO400">go2binder.com/us-KBF-S-ECO400</a>
KBF-S ECO 720	25	> <a href="https://go2binder.com/us-KBF-S-ECO720">go2binder.com/us-KBF-S-ECO720</a>
KBF-S ECO 1020	36	> <a href="https://go2binder.com/us-KBF-S-ECO1020">go2binder.com/us-KBF-S-ECO1020</a>

## OPTIONAL EQUIPMENT

<b>LED light bars</b>	LED light bars in three different lengths (30, 50, 90 cm) can be easily and variably positioned in the BINDER unit, including various attachment options and control unit. Additional light bars can be added as desired.	
<b>Access port with silicone plug</b>	For introducing external measuring instruments. Large selection of different diameters and positions (left, right, or top).	
<b>Door lock</b>	Lockable door handle prevents unauthorized access.	
<b>Services</b>	You can access our installation, maintenance, calibration, validation, or warranty services by taking out a Maintenance Service Agreement or by simply getting in touch when you need us. More information is available in the accessories and services chapter.	

► All extras online [go2binder.com/us](https://go2binder.com/us)

## TECHNICAL DATA

Data				
Designation	KBF-S ECO 240	KBF-S ECO 400	KBF-S ECO 720	KBF-S ECO 1020
Option model	Standard	Standard	Standard	Standard
Performance Data Temperature				
Temperature range	(max. 28 °C under ambient temperature) 0...70 °C	(max. 26 °C under ambient temperature) 0...70 °C	(max. 24 °C under ambient temperature) 0...70 °C	(max. 24 °C under ambient temperature) 0...70 °C
Max. heat compensation at 40°C	250 W	300 W	400 W	400 W
Performance Data Climate				
Temperature range with humidity	(max. 28 °C under ambient temperature) 5...70 °C	(max. 26 °C under ambient temperature) 5...70 °C	(max. 24 °C under ambient temperature) 5...70 °C	(max. 24 °C under ambient temperature) 5...70 °C
Humidity range	10...80 % r.F.	10...80 % r.F.	10...80 % r.F.	10...80 % r.F.
Temperature uniformity at 25°C and 60% RH	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K
Temperature uniformity at 40°C and 75% RH	0.2 ± K	0.5 ± K	0.3 ± K	0.5 ± K
Temperature fluctuation at 25°C and 60% RH	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K
Temperature fluctuation at 40°C and 75% RH	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K
Humidity fluctuation at 25°C and 60% RH	0.3 ± % r.F.	0.3 ± % r.F.	0.3 ± % r.F.	0.4 ± % r.F.
Humidity fluctuation at 40°C and 75% RH	0.3 ± % r.F.	0.3 ± % r.F.	0.3 ± % r.F.	0.4 ± % r.F.
Recovery time after door was opened for 30 s at 25°C and 60% RH	5 min	6 min	7 min	5 min
Recovery time after door was opened for 30 s at 40°C and 75% RH	11 min	15 min	17 min	15 min
Electrical data				
Power frequency	50/60 Hz			
Nominal power	0,8 kW	1,1 kW	1,2 kW	1,2 kW
Unit fuse	16,0 A	16,0 A	16,0 A	16,0 A
Phase (Nominal voltage)	1~	1~	1~	1~
Dimensions and weights				
Interior volume	9 cu.ft	14 cu.ft	25 cu.ft	36 cu.ft
Net weight of the unit (empty)	322 lbs	423 lbs	589 lbs	710 lbs
Load per rack	66 lbs	66 lbs	99 lbs	99 lbs
Permitted load	220 lbs	265 lbs	331 lbs	331 lbs
Wall clearance back	3,94 in	3,94 in	3,94 in	3,94 in
Wall clearance sidewise	7,09 in	7,09 in	7,09 in	7,09 in
Housing dimensions not incl. fittings and connections				
Width net	36.69 in	36.42 in	49.37 in	49.37 in
Height net	57.52 in	76.61 in	75.79 in	75.79 in
Depth net	31.34 in	31.34 in	34.84 in	45.12 in
Internal Dimensions				
Interior width	25.59 in	25.59 in	38.31 in	38.31 in
Interior height	30.91 in	49.92 in	49.21 in	49.21 in
Interior depth	19.09 in	19.09 in	22.68 in	32.91 in
Unit doors	1	1	2	2




Environment-specific data				
Sound-pressure level	46 dB(A)	45 dB(A)	48 dB(A)	49 dB(A)
Energy consumption at 25°C and 60% RH	55 Wh/h	60 Wh/h	90 Wh/h	90 Wh/h
Energy consumption at 40°C and 75% RH	85 Wh/h	70 Wh/h	130 Wh/h	135 Wh/h
Fixtures				
Number of shelves (std./max.)	2/9	2/15	2/15	2/15

## ORDERING INFORMATION

Interior volume		Power supply - unit fuse	Plug*	Version	Model version	Art.-No.
[cu.ft.]	[L]					
Model KBF-S ECO 240						
9	247	200...230 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFSECO240-230V	9020-0416
		100...120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBFSEC-O240UL-120V	9020-0420
Model KBF-S ECO 400						
14	400	200...230 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFSECO400-230V	9020-0463
		100...120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBFSEC-O400UL-120V	9020-0464
Model KBF-S ECO 720						
25	700	200...230 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFSECO720-230V	9020-0418
		100...120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBFSEC-O720UL-120V	9020-0421
Model KBF-S ECO 1020						
36	1,020	200...230 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFSECO1020-230V	9020-0419
		100...120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBFSEC-O1020UL-120V	9020-0422

## EXTRACT OF FULFILLED STANDARDS

- ICH Q1A(R2)

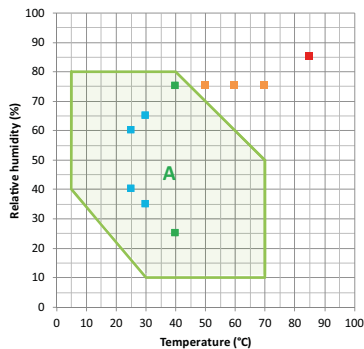


■ ICH Long term stability testing  
■ Accelerated stability testing  
■ ICH Stress testing  
■ Industrial THB testing (85/85)


A: Guaranteed condensation-free range

## DIMENSIONS AND WEIGHTS


KBF-S ECO 240

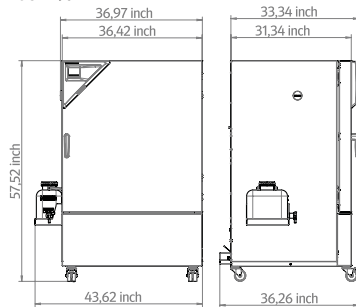


KBF-S ECO 400

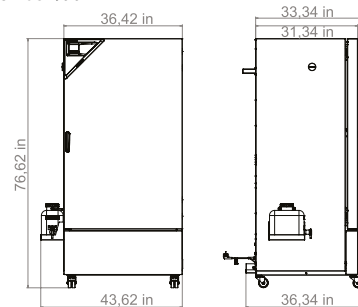

KBF-S ECO 720

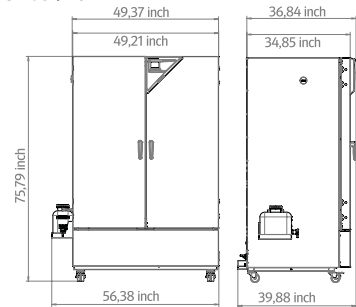

KBF-S ECO 1020

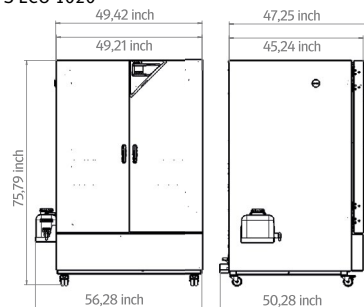

## OPTIONS

Designation	Description	KBF-S ECO 240	KBF-S ECO 400	KBF-S ECO 720	KBF-S ECO 1020	*	Art.-No.
Access port with silicone plug	left						
	30 mm	•	•	•	•	01	8012-2072
	50 mm	•	•	•	•	01	8012-2079
	100 mm	•	•	•	•	01	8012-2077
	right						
	30 mm	•	•	•	•	01	8012-2071
	50 mm	•	•	•	•	01	8012-2078
	100 mm	•	•	•	•	01	8012-2076
	top						
	30 mm	•	•	•	•	01	8012-2073
	50 mm	•	•	•	•	01	8012-2074
	100 mm	•	•	•	•	01	8012-2075
Calibration certificate, expanded	for temperature and humidity; for extending the measurement in center of chamber to include another test value	•	•	•	•	-	8012-2066

Designation	Description	KBF-S ECO 240	KBF-S ECO 400	KBF-S ECO 720	KBF-S ECO 1020	*	Art.-No.
Calibration certificate, temperature	temperature measurement incl. certificate, 9 measuring points at specified temperature	•	•	•	•	-	8012-2067
	temperature measurement incl. certificate, 15- 18 measuring points at specified temperature	•	•	•	•	-	8012-2068
	temperature measurement incl. certificate and 27 measuring points at specified temperature	•	•	•	•	-	8012-2069
Calibration certificate, temperature and humidity	Measurement in center of chamber at 25°C / 60% RH or at specified test values	•	•	•	•	-	8012-2065
	temperature (according to DIN12880) and humidity measurement incl. certificate, 27 temperature measuring points and 1 humidity measuring point, at 25 °C / 60 % RH or at specified values	•	•	•	•	-	8012-2070
Door lock	lockable door handle	•	•	–	–	-	8012-2086
		–	–	•	•	-	8012-2087

## ACCESSORIES

Designation	Description	KBF-S ECO 240	KBF-S ECO 400	KBF-S ECO 720	KBF-S ECO 1020	*	Art.-No.
APT-COM™ 4 BASIC-Edition	for simple logging and documentation requirements with up to 5 networked units.						
	version 4, BASIC edition	•	•	•	•	-	9053-0039
APT-COM™ 4 GLP-Edition	for working under GLP-compliant conditions. Measured values are documented in a tamper-proof way in line with the requirements of FDA Regulation 21 CFR 11.						
	version 4, GLP edition	•	•	•	•	-	9053-0042
APT-COM™ 4 PROFESSIONAL-Edition	convenient unit and user management built on the BASIC edition. Suitable for networking up to 100 units.						
	version 4, PROFESSIONAL edition	•	•	•	•	-	9053-0040
BINDER PURE AQUA SERVICE	System for preparation or complete desalination of tap water, complete set containing PURE AQUA 300 single-use cartridge, measuring device, and all necessary connecting parts	•	•	•	•	-	8012-0759
BINDER PURE AQUA SERVICE, accessories	Single-use, replacement cartridge for BINDER PURE AQUA System	•	•	•	•	-	6011-0165
Convenient water supply	Flexible positioning of the water container with magnetic holder, hose adapter for water container with practical quick coupling, and water stop function						
	External, with magnetic holder	•	•	•	•	-	8012-1847
LED light bars	Basic set consisting of 2 pieces, attachment material, control unit for max. 4 light strips, 100-240 V, 50/60 Hz						
	Basic set 300, length 30 cm	•	•	•	•	-	8012-1107
	Basic set 500, length 50 cm	•	•	•	•	-	8012-1108
	Basic set 900, length 90 cm	–	–	•	•	-	8012-1109
	Expansion set consisting of 2 pieces, attachment material: clips. For expanding the basic set of light bars						
	Expansion set 300, length 30 cm	•	•	•	•	-	8012-1716
	Expansion set 500, length 50 cm	•	•	•	•	-	8012-1717
	Expansion set 900, length 90 cm	–	–	•	•	-	8012-1718

Designation	Description	KBF-S ECO 240	KBF-S ECO 400	KBF-S ECO 720	KBF-S ECO 1020	*	Art.-No.
pH-neutral detergent	concentrated, for gentle remove of residual contaminants; 1 kg	•	•	•	•	-	8012-2250
Qualification documents	IQ/OQ/PQ documents – supporting documents for validation performed by customers, according to customer requirements, PQ section added to qualification folder IQ/OQ; parameters: temperature and humidity values						
	Digital in PDF format	•	•	•	•	-	7057-0006
	Hard copy inside folder	•	•	•	•	-	7007-0006
	IQ/OQ documents – supporting documents for validation performed by customers, consisting of: IQ/OQ checklists incl. calibration guide and comprehensive unit documentation; parameters: temperature and humidity values						
	Digital in PDF format	•	•	•	•	-	7057-0002
	Hard copy inside folder	•	•	•	•	-	7007-0002
Rack	stainless steel	•	•	–	–	-	8012-2050
		–	–	•	–	-	8012-2051
		–	–	–	•	-	8012-2052
Rack, reinforced	stainless steel, with fasteners (1 set of 4)	•	•	–	–	-	8012-0638
		–	–	•	–	-	8012-0674
		–	–	–	•	-	8012-0968
Rack accessories	fasteners (1 set of 4) for additional security of racks	•	•	•	•	-	8012-2280
Shelf, perforated	Stainless steel	•	•	–	–	-	8012-2163
		–	–	•	–	-	8012-2252
		–	–	–	•	-	8012-2254

## SERVICES

Designation	Description	*	Art.-No.
1-year warranty extension	The warranty is extended by 1 year from the delivery date, wear parts are excluded	-	DL50-0030
BRONZE 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate. 10% Discount on Spare Parts and Labor for any additional Services needed Wear + tear parts to be purchased or billed to customer. Travel to be quoted as separate.	-	DL20-0710
Execution of IQ/OQ	Execution of IQ/OQ in accordance with qualification folder. Travel to be quoted separate.	-	DL42-0300
Execution of IQ/OQ/PQ	Execution of IQ/OQ/PQ in accordance with qualification folder. Travel to be quoted separate.	-	DL44-0500
GOLD 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate of Temperature. 25% Discount on Spare Parts and Labor for any additional Services needed. One additional courtesy visit per year can be used for service visit or operator. Wear + tear parts to be purchased or billed to customer. Travel to be quoted separate.	-	DL20-0925
Preventive maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Checking a test temperature specified by the user in center of usable space without certificate. Wear + tear parts need to be purchased or billed to customer. Travel to be quoted as separate.	-	DL20-0605
SILVER 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate 15% Discount on Spare Parts and Labor for any additional Services needed One additional courtesy visit per year can be used for service visit or operator training. Wear + tear parts to be purchased or billed to customer. Travel to be quoted separate.	-	DL20-0825
Temperature and humidity calibration	Expansion –Additional Temperature and humidity calibration with 1 measuring point in center of chamber with 1 specified pair of values, including certificate. Travel to be quoted separate.	-	DL30-0302
	Temperature and humidity calibration with 1 measuring point in center of chamber with 1 specified pair of values, including certificate. Travel to be quoted separate.	-	DL30-0310

Designation	Description	*	Art.-No.
Temperature measurement, 9 temperature measuring points and 1 humidity measuring point	Temperature measurement with 9 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 3 shelves are required.	-	DL30-0309
Temperature measurement, 18 temperature measuring points and 1 humidity measuring point	Temperature measurement with 18 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 2 shelves are required.	-	DL30-0318
Temperature measurement, 27 temperature measuring points and 1 humidity measuring point	Temperature measurement with 27 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 3 shelves are required.	-	DL30-0327
Unit installation	Connect the unit to the customer-side connections (electricity, water, wastewater, gas), basic functions check, brief operating instructions. (excl.: unpacking, setup, controller instructions, programming, installation work) Travel to be quoted as separate.	-	DL10-0300
Unit instructions	Instruction regarding operating principle and basic functions of the unit, operation of the control electronics including programming. Travel to be quoted as separate Limited to 3 hours.	05	DL10-0700

## Series KBF | with a large temperature / humidity range

The proven specialist for reliable ICH stability tests in the pharmaceutical industry: the KBF masters all long-term tests, accelerated tests and stress tests. It fulfills all important ICH requirements, from precision to programming and documentation. With flexible water supply options for all installation locations. In addition, the new KBF consumes up to 40 % less energy than its predecessor. With optional LED light packages, the KBF can be converted into an ICH photostability chamber and a plant growth chamber.



Model 470

### BENEFITS

- A reliable option for critical ICH stability testing thanks to maximum climate homogeneity, even when the unit is fully loaded
- Reliable: failsafe operation over the long term thanks to proven compressor technology and interior made of stainless steel
- Smart: signal triangle with light-up status display and ergonomic control terminal with touchscreen program controller
- Economical: up to 40% lower energy consumption than the previous model thanks to modern inverter cooling technology







### IMPORTANT CHARACTERISTICS

- Temperature range: 0°C to +70°C
- Humidity range: 10% to 80% RH
- Proven APT.line™ preheating chamber technology
- Up to 40% lower energy consumption compared to the previous model
- Energy-efficient cooling with modern inverter cooling unit
- Cooling with climate-neutral R-600a refrigerant
- Door heating to prevent condensation
- Adjustable fan speed
- Humidity regulation with capacitive humidity sensor and responsive steam humidification
- Robust housing design with HIT sandwich technology
- Stainless-steel inner chamber
- Inner doors made of metal oxide-coated safety glass
- Two racks made of stainless steel
- Large access port with silicone plug
- Tabletop units (up to model 130) are stackable with stacking adapter
- Floor-standing units (from model 260) featuring robust twin casters, with brakes at the front
- Intuitive touchscreen controller with time-segment and real-time programming
- Ergonomically adjustable control terminal (from model 470)
- Signal triangle with light-up status display (from model 470)
- Internal data logger, measured values can be read out in open format via USB
- Class 3.3 independent temperature safety device (DIN 12880) with visual and acoustic alarms
- Unit self-test for comprehensive status analysis
- Data interfaces: Ethernet, USB
- BINDER Multi Management Software APT-COM™ basic edition
- Optional light modules for ICH photostability testing (for models 260, 470, 720)
- Optional LED light modules for plant growth (for models from 260)

## AVAILABLE SIZES

Designation	Interior volume (cu.ft)	Online data sheets
KBF 130	4	› <a href="https://go2binder.com/us-KBF130">go2binder.com/us-KBF130</a>
KBF 260	9	› <a href="https://go2binder.com/us-KBF260">go2binder.com/us-KBF260</a>
KBF 470	17	› <a href="https://go2binder.com/us-KBF470">go2binder.com/us-KBF470</a>
KBF 720	26	› <a href="https://go2binder.com/us-KBF720">go2binder.com/us-KBF720</a>
KBF 1060	38	› <a href="https://go2binder.com/us-KBF1060">go2binder.com/us-KBF1060</a>
KBF 1600	57	› <a href="https://go2binder.com/us-KBF1600">go2binder.com/us-KBF1600</a>

## OPTIONAL EQUIPMENT

<b>ICH-Lighting module</b>	<p>Light cassettes and supply module for upgrading a cooling incubator to a photostability test chamber. Can be retrofitted in two versions with or without light sensors for light dose control (LQC). Complies with ICH guideline Q1B.</p> <p><b>KBF PRO 260, 470, 720</b></p>	
<b>Plant Lighting module</b>	<p>LED light strips with supply module and control unit for the three light channels warm white, cool white and dark red. The light strips can be positioned flexibly and are attached to standard slide-in grids.</p> <p><b>KBF PRO 260, 470, 720, 1060, 1600</b></p>	
<b>CO<sub>2</sub> Gassing module</b>	<p>The free-standing units in the KBF PRO series can be retrofitted with a CO<sub>2</sub> gassing module. Control ranges 0-1 vol.-% CO<sub>2</sub> for plants or 0-20 vol.-%CO<sub>2</sub> for cell cultures.</p> <p><b>KBF PRO 260, 470, 720, 1060, 1600</b></p>	
<b>Water treatment</b>	<p>BINDER PURE AQUA Service for the treatment or demineralization of tap water for the humidification systems of BINDER climate chambers. The complete set containing PURE AQUA 300 single-use cartridge, measuring device, and all necessary connecting parts.</p>	
<b>Services</b>	<p>You can access our installation, maintenance, calibration, validation, or warranty services by taking out a Maintenance Service Agreement or by simply getting in touch when you need us. More information is available in the accessories and services chapter.</p>	
<b>BINDER Customized Solutions</b>	<p>Using a BINDER series production product as a basis, we develop individual solutions as a single unit or in small batches. All products are tested, certified, and supplied with a full functional guarantee and warranty. More information is available in the accessories and services chapter.</p>	

› All extras online [go2binder.com/us](https://go2binder.com/us)

## TECHNICAL DATA

Data						
Designation	KBF 130	KBF 260	KBF 470	KBF 720	KBF 1060	KBF 1600
Option model	Standard	Standard	Standard	Standard	Standard	Standard
Performance Data Temperature						
Temperature range	0...70 °C	0...70 °C	0...70 °C	0...70 °C	0...70 °C	0...70 °C
Max. heat compensation at 40°C	270 W	410 W	530 W	640 W	640 W	640 W
Performance Data Climate						
Temperature range with humidity	10...70 °C	10...70 °C	10...70 °C	10...70 °C	10...70 °C	10...70 °C
Humidity range	10...80 % r.F.	10...80 % r.F.	10...80 % r.F.	10...80 % r.F.	10...80 % r.F.	10...80 % r.F.
Temperature uniformity at 25°C and 60% RH	0.2 ± K	0.3 ± K	0.2 ± K	0.3 ± K	0.3 ± K	0.4 ± K
Temperature uniformity at 40°C and 75% RH	0.2 ± K	0.2 ± K	0.2 ± K	0.2 ± K	0.2 ± K	0.3 ± K
Temperature fluctuation at 25°C and 60% RH	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K
Temperature fluctuation at 40°C and 75% RH	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K
Humidity fluctuation at 25°C and 60% RH	1.5 ± % r.F.	1.5 ± % r.F.	1.5 ± % r.F.	1.5 ± % r.F.	1.5 ± % r.F.	1.5 ± % r.F.
Humidity fluctuation at 40°C and 75% RH	1.5 ± % r.F.	1.5 ± % r.F.	1.5 ± % r.F.	1.5 ± % r.F.	1.5 ± % r.F.	1.5 ± % r.F.
Recovery time after door was opened for 30 s at 25°C and 60% RH	3 min	1 min	1 min	1 min	2 min	2 min
Recovery time after door was opened for 30 s at 40°C and 75% RH	3 min	3 min	4 min	5 min	5 min	6 min
Electrical data						
Power frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Nominal power	1,3 kW	1,4 kW	1,4 kW	1,6 kW	1,6 kW	1,7 kW
Unit fuse	16,0 A	16,0 A	16,0 A	16,0 A	16,0 A	16,0 A
Phase (Nominal voltage)	1~	1~	1~	1~	1~	1~
Dimensions and weights						
Interior volume	4 cu.ft	9 cu.ft	17 cu.ft	26 cu.ft	38 cu.ft	57 cu.ft
Net weight of the unit (empty)	278 lbs	414 lbs	496 lbs	657 lbs	750 lbs	966 lbs
Load per rack	55 lbs	66 lbs	88 lbs	88 lbs	88 lbs	88 lbs
Permitted load	110 lbs	198 lbs	198 lbs	220 lbs	220 lbs	220 lbs
Wall clearance back	3,94 in	3,94 in	3,94 in	3,94 in	3,94 in	3,94 in
Wall clearance sidewise	3,94 in	7,09 in	7,09 in	7,09 in	7,09 in	7,09 in
Housing dimensions not incl. fittings and connections						
Width net	35.43 in	36.61 in	36.61 in	50.59 in	50.59 in	70.67 in
Height net	39.57 in	54.96 in	76.81 in	76.81 in	76.81 in	76.81 in
Depth net	27.95 in	35.43 in	35.43 in	35.43 in	46.26 in	46.26 in
Internal Dimensions						
Interior width	25.83 in	25.83 in	25.83 in	39.8 in	39.8 in	59.88 in
Interior height	19.69 in	27.36 in	49.21 in	49.21 in	49.21 in	49.21 in
Interior depth	15.2 in	22.64 in	22.64 in	22.64 in	33.35 in	33.35 in
Inner doors	1	1	1	2	2	2




Unit doors	1	1	1	2	2	2
Environment-specific data						
Sound-pressure level at 25°C and 60% RH	47 dB(A)	50 dB(A)	51 dB(A)	51 dB(A)	52 dB(A)	54 dB(A)
Fixtures						
Number of shelves (std./ max.)	2/6	2/9	2/16	2/16	2/16	2/16

## ORDERING INFORMATION

Interior volume		Power supply - unit fuse	Plug*	Version	Model version	Art.-No.
[cu.ft.]	[L]					
Model KBF 130						
4	127	200...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBF130-230V	9020-0478
		120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBF130UL-120V	9020-0494
Model KBF 260						
9	262	220...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBF260-230V	9020-0479
		120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBF260UL-120V	9020-0495
Model KBF 470						
17	472	220...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBF470-230V	9020-0480
		120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBF470UL-120V	9020-0496
Model KBF 720						
26	727	220...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBF720-230V	9020-0481
		120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBF720UL-120V	9020-0497
Modell KBF 1060						
38	1,070	220...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBF1060-230V	9020-0482
		120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBF1060UL-120V	9020-0498
Model KBF 1600						
57	1,610	220...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBF1600-230V	9020-0483
		120 V 1~ 50/60 Hz -16,0 A	NEMA 5-20	Standard	KBF1600UL-120V	9020-0499


## EXTRACT OF FULFILLED STANDARDS

- ICH Q1A(R2)



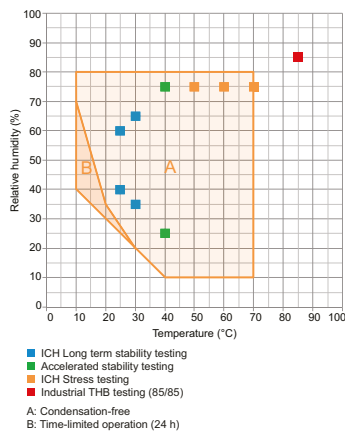


## DIMENSIONS AND WEIGHTS



KBF 130





KBF 260





KBF 470





KBF 260



KBF 720



KBF 1060



## OPTIONS

Designation	Description	KBF 130	KBF 260	KBF 470	KBF 720	KBF 1060	KBF 1600	*	Art.-No.
Access port with silicone plug	left								
	30 mm	•	•	•	•	•	•	01	8012-2481
	50 mm	•	•	•	•	•	•	01	8012-2482
	100 mm	–	•	•	•	•	•	01	8012-2483
	right								
	30 mm	•	•	•	•	•	•	01	8012-2484
	50 mm	•	•	•	•	•	•	01	8012-2485
	100 mm	–	•	•	•	•	•	01	8012-2486
	top								
	30 mm	•	•	•	•	•	•	01	8012-2499
	50 mm	•	•	•	•	•	•	01	8012-2487
	100 mm	•	•	•	•	•	•	01	8012-2488
Alarm	Accessible via 3-pin clamping sleeve (max. 24 V - 2.5 A), with acoustic signal that can be switched off	•	•	•	•	•	•	-	8012-2503
Analog output 4-20 mA	for temperature and humidity values (output not adjustable)	•	•	•	•	•	•	-	8012-2574
Calibration certificate, expanded	for temperature and humidity; for extending the measurement in center of chamber to include another test value	•	•	•	•	•	•	-	8012-2575
Calibration certificate, temperature	temperature measurement incl. certificate, 9 measuring points at specified temperature	•	•	•	•	•	•	-	8012-2378
	temperature measurement incl. certificate, 15- 18 measuring points at specified temperature	•	•	•	•	•	•	-	8012-2382
	temperature measurement incl. certificate and 27 measuring points at specified temperature	•	•	•	•	•	•	-	8012-2426
Calibration certificate, temperature and humidity	Measurement in center of chamber at 25°C / 60% RH or at specified test values	•	•	•	•	•	•	-	8012-2437
	temperature (according to DIN12880) and humidity measurement incl. certificate, 27 temperature measuring points and 1 humidity measuring point, at 25 °C / 60 % RH or at specified values	•	•	•	•	•	•	-	8012-2577
Door lock	lockable door handle	•	•	•	–	–	–	-	8012-2535
		–	–	–	•	•	•	-	8012-2536
Door lock, electromechanical	can be opened with PIN code via controller	•	•	•	–	–	–	-	8012-2537
		–	–	–	•	•	•	-	8012-2589
Inner chamber, reinforced	max. total load 100 kg	•	–	–	–	–	–	-	8012-2518
	max. total load 180 kg	–	•	–	–	–	–	-	8012-2519
		–	–	•	–	–	–	-	8012-2520
	max. total load 200 kg	–	–	–	•	–	–	-	8012-2521
		–	–	–	–	•	–	-	8012-2522
Interior lighting	With climate-resistant LEDs, switches when the unit door is opened	•	•	•	–	–	–	-	8012-2561
		–	–	–	•	•	–	-	8012-2565
		–	–	–	–	–	•	-	8012-2569

Designation	Description	KBF 130	KBF 260	KBF 470	KBF 720	KBF 1060	KBF 1600	*	Art.-No.
LED light bars	Basic set consisting of 2 pieces, attachment material, control unit for max. 4 light strips, 100-240 V, 50/60 Hz								
	Basic set 300, length 30 cm	–	–	•	–	–	–	-	8012-1107
	Basic set 500, length 50 cm	–	–	•	–	–	–	-	8012-1108
	Expansion set consisting of 2 pieces, attachment material: clips. For expanding the basic set of light bars								
	Expansion set 300, length 30 cm	–	–	•	–	–	–	-	8012-1716
	Expansion set 500, length 50 cm	–	–	•	–	–	–	-	8012-1717
Shipping pallet	with unloading ramp for installing unit without forklift	–	•	•	•	•	•	-	8012-2547
Specimen temperature display	Flexible Pt 100 indoor temperature sensor, for object temperature display or control	•	•	•	•	•	•	-	8012-2591
Swivel casters, height-adjustable	For horizontal alignment of the unit on uneven floors	–	•	•	•	•	•	-	8012-2543

## ACCESSORIES

Designation	Description	KBF 130	KBF 260	KBF 470	KBF 720	KBF 1060	KBF 1600	*	Art.-No.
APT-COM™ 4 GLP-Edition	for working under GLP-compliant conditions. Measured values are documented in a tamper-proof way in line with the requirements of FDA Regulation 21 CFR 11.								
	version 4, GLP edition	•	•	•	•	•	•	-	9053-0042
APT-COM™ 4 PROFESSIONAL-Edition	convenient unit and user management built on the BASIC edition. Suitable for networking up to 100 units.								
	version 4, PROFESSIONAL edition	•	•	•	•	•	•	-	9053-0040
Base	With swivel casters, for mobile installation or leveling of the unit or stack of units	•	–	–	–	–	–	-	9051-0045
BINDER PURE AQUA SERVICE	System for preparation or complete desalination of tap water, complete set containing PURE AQUA 300 single-use cartridge, measuring device, and all necessary connecting parts	•	•	•	•	•	•	-	8012-0759
BINDER PURE AQUA SERVICE, accessories	Single-use, replacement cartridge for BINDER PURE AQUA System	•	•	•	•	•	•	-	6011-0165
CO <sub>2</sub> gassing module	BINDER CO <sub>2</sub> gassing module 0-1%, with NDIR CO <sub>2</sub> sensor and analog output 4-20 mA	–	•	•	•	•	•	-	8012-2140
	BINDER CO <sub>2</sub> gassing module 0-20%, with NDIR CO <sub>2</sub> sensor and analog output 4-20 mA	–	•	•	•	•	•	-	8012-2138
ICH light module	BINDER ICH-Q1B light module consisting of a VIS cassette and a UVA cassette as well as an independent power supply	–	•	•	–	–	–	-	8012-2441
		–	–	–	•	–	–	-	8012-2442
	BINDER ICH-Q1B light module with light-dose control consisting of a VIS cassette, a UVA cassette, a spherical VIA sensor, a spherical UVA sensor as well as an independent power supply	–	•	•	–	–	–	-	8012-2443
		–	–	–	•	–	–	-	8012-2444

Designation	Description	KBF 130	KBF 260	KBF 470	KBF 720	KBF 1060	KBF 1600	*	Art.-No.
LED light bars	Basic set consisting of 2 pieces, attachment material, control unit for max. 4 light strips, 100-240 V, 50/60 Hz								
	Basic set 300, length 30 cm	•	•	–	–	–	–	-	8012-1107
	Basic set 500, length 50 cm	•	•	–	•	•	•	-	8012-1108
	Basic set 900, length 90 cm	–	–	–	•	•	•	-	8012-1109
	Expansion set consisting of 2 pieces, attachment material: clips. For expanding the basic set of light bars								
	Expansion set 300, length 30 cm	•	•	–	–	–	–	-	8012-1716
	Expansion set 500, length 50 cm	•	•	–	•	•	•	-	8012-1717
	Expansion set 900, length 90 cm	–	–	–	•	•	•	-	8012-1718
Light module for plants	BINDER LED plant light module consisting of 16 LED strip lights, 3-channel controller and fresh air pump as well as independent power supply	–	•	•	•	•	•	-	8012-2439
pH-neutral detergent	concentrated, for gentle remove of residual contaminants; 1 kg	•	•	•	•	•	•	-	8012-2250
Qualification documents	IQ/OQ/PQ documents – supporting documents for validation performed by customers, according to customer requirements, PQ section added to qualification folder IQ/OQ; parameters: temperature and humidity values								
	Digital in PDF format	•	•	•	•	•	•	-	7057-0006
	Hard copy inside folder	•	•	•	•	•	•	-	7007-0006
	IQ/OQ documents – supporting documents for validation performed by customers, consisting of: IQ/OQ checklists incl. calibration guide and comprehensive unit documentation; parameters: temperature and humidity values								
	Digital in PDF format	•	•	•	•	•	•	-	7057-0002
	Hard copy inside folder	•	•	•	•	•	•	-	7007-0002

Designation	Description	KBF 130	KBF 260	KBF 470	KBF 720	KBF 1060	KBF 1600	*	Art.-No.
Shelves	Shelf rack in set with pair of retaining rails (U rails), made entirely of stainless steel								
	Load-bearing capacity 25 kg	•	–	–	–	–	–	-	8012-2389
		•	–	–	–	–	–	-	8012-2406
		–	•	•	–	–	–	-	8012-2384
		–	•	•	–	–	–	-	8012-2390
		–	•	•	–	–	–	-	8012-2407
		–	–	–	•	–	–	-	8012-2385
	Load-bearing capacity 40 kg	–	–	–	•	–	–	-	8012-2391
		–	–	–	•	–	–	-	8012-2408
		–	–	–	–	•	–	-	8012-2386
		–	–	–	–	•	–	-	8012-2392
		–	–	–	–	•	–	-	8012-2409
		–	–	–	–	–	•	-	8012-2387
		–	–	–	–	–	•	-	8012-2393
		–	–	–	–	–	•	-	8012-2410
		•	–	–	–	–	–	-	8012-2412
		–	•	•	–	–	–	-	8012-2413
		–	–	–	•	–	–	-	8012-2414
		–	–	–	–	•	–	-	8012-2415
Stacking adapter	For safe stacking of two identical units	•	–	–	–	–	–	-	9051-0048
Water supply	External, free-standing, set consisting of 20-liter fresh water canister with pump and level sensor and 20-liter waste water canister	•	•	•	•	•	•	-	8012-2592

## SERVICES

Designation	Description	*	Art.-No.
1-year warranty extension	The warranty is extended by 1 year from the delivery date, wear parts are excluded	-	DL50-0030
BRONZE 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate. 10% Discount on Spare Parts and Labor for any additional Services needed Wear + tear parts to be purchased or billed to customer. Travel to be quoted as separate.	-	DL20-0710
Execution of IQ/OQ	Execution of IQ/OQ in accordance with qualification folder. Travel to be quoted separate.	-	DL42-0300
Execution of IQ/OQ/PQ	Execution of IQ/OQ/PQ in accordance with qualification folder. Travel to be quoted separate.	-	DL44-0500
GOLD 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate of both Temperature and Humidity. 25% Discount on Spare Parts and Labor for any additional Services needed. One additional courtesy visit per year can be used for service visit or operator. Wear + tear parts to be purchased or billed to customer. Travel to be quoted separate.	-	DL20-0920
Preventive maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Checking a test temperature specified by the user in center of usable space without certificate. Wear + tear parts need to be purchased or billed to customer. Travel to be quoted as separate.	-	DL20-0613
SILVER 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate 15% Discount on Spare Parts and Labor for any additional Services needed One additional courtesy visit per year can be used for service visit or operator training. Wear + tear parts to be purchased or billed to customer. Travel to be quoted separate.	-	DL20-0820

Designation	Description	*	Art.-No.
Temperature and humidity calibration	Expansion –Additional Temperature and humidity calibration with 1 measuring point in center of chamber with 1 specified pair of values, including certificate. Travel to be quoted separate.	-	DL30-0302
	Temperature and humidity calibration with 1 measuring point in center of chamber with 1 specified pair of values, including certificate. Travel to be quoted separate.	-	DL30-0340
Temperature measurement, 9 temperature measuring points and 1 humidity measuring point	Temperature measurement with 9 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 3 shelves are required.	-	DL30-0309
Temperature measurement, 18 temperature measuring points and 1 humidity measuring point	Temperature measurement with 18 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 2 shelves are required.	-	DL30-0318
Temperature measurement, 27 temperature measuring points and 1 humidity measuring point	Temperature measurement with 27 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 3 shelves are required.	-	DL30-0327
Unit installation	Connect the unit to the customer-side connections (electricity, water, wastewater, gas), basic functions check, brief operating instructions. (excl.: unpacking, setup, controller instructions, programming, installation work) Travel to be quoted as separate.	-	DL10-0300
Unit instructions	Instruction regarding operating principle and basic functions of the unit, operation of the control electronics including programming. Travel to be quoted as separate Limited to 3 hours.	05	DL10-0700

## Series KBF PRO | with expanded temperature / humidity range

A powerful all-rounder among constant climate chambers: Equipped with all kinds of sophisticated technology, the KBF PRO takes any material test in its stride – whether it takes place at -20°C or under THB conditions at +85°C and 85% relative humidity. It offers flexible water supply options for all installation sites and consumes up to 40% less energy than its predecessor, the KMF model.



Model 470

### BENEFITS

- Reliable and powerful thanks to innovative temperature control technology
- Reliable: failsafe operation over the long term thanks to proven compressor technology and inner chamber made of stainless steel
- Smart: signal triangle with light-up status display, ergonomic control terminal with touchscreen program controller, rack with telescopic rails
- Efficient: low energy consumption thanks to modern inverter cooling technology

### IMPORTANT CHARACTERISTICS







- Temperature range: -20°C to +100°C
- Humidity range: 10% to 98% RH
- Proven APT.line™ preheating chamber technology
- Up to 40% lower energy consumption compared to the previous model
- Energy-efficient cooling with modern inverter cooling unit
- Cooling with climate-neutral R-290 refrigerant
- Door heating to prevent condensation
- Adjustable fan speed
- Humidity regulation with capacitive humidity sensor and responsive steam humidification
- Robust housing design with HIT sandwich technology
- Stainless-steel inner chamber
- Inner doors made of metal oxide-coated safety glass
- Two racks made of stainless steel (for models from 260 with telescopic rails)
- Large access port with silicone plug
- Tabletop units (up to model 130) are stackable with stacking adapter
- Floor-standing units (from model 260) featuring robust twin casters, with brakes at the front
- Intuitive touchscreen controller with time-segment and real-time programming
- Ergonomically adjustable control terminal (from model 470)
- Signal triangle with light-up status display (from model 470)
- Internal data logger, measured values can be read out in open format via USB
- Class 3.3 independent temperature safety device (DIN 12880) with visual and acoustic alarms
- Unit self-test for comprehensive status analysis
- Data interfaces: Ethernet, USB
- BINDER Multi Management Software APT-COM™ basic edition
- Optional light modules for ICH photostability testing (for models 260, 470, 720)
- Optional LED light modules for plant growth (for models from 260)



## AVAILABLE SIZES

Designation	Interior volume (cu.ft)	Online data sheets
KBF PRO 130	4	› <a href="https://go2binder.com/us-KBF-PRO130">go2binder.com/us-KBF-PRO130</a>
KBF PRO 260	9	› <a href="https://go2binder.com/us-KBF-PRO260">go2binder.com/us-KBF-PRO260</a>
KBF PRO 470	17	› <a href="https://go2binder.com/us-KBF-PRO470">go2binder.com/us-KBF-PRO470</a>
KBF PRO 720	26	› <a href="https://go2binder.com/us-KBF-PRO720">go2binder.com/us-KBF-PRO720</a>
KBF PRO 1060	38	› <a href="https://go2binder.com/us-KBF-PRO1060">go2binder.com/us-KBF-PRO1060</a>
KBF PRO 1600	57	› <a href="https://go2binder.com/us-KBF-PRO1600">go2binder.com/us-KBF-PRO1600</a>

## OPTIONAL EQUIPMENT

<b>ICH-Lighting module</b>	<p>Light cassettes and supply module for upgrading a cooling incubator to a photostability test chamber. Can be retrofitted in two versions with or without light sensors for light dose control (LQC). Complies with ICH guideline Q1B.</p> <p><b>KBF PRO 260, 470, 720</b></p>	
<b>Plant Lighting module</b>	<p>LED light strips with supply module and control unit for the three light channels warm white, cool white and dark red. The light strips can be positioned flexibly and are attached to standard slide-in grids.</p> <p><b>KBF PRO 260, 470, 720, 1060, 1600</b></p>	
<b>CO<sub>2</sub> Gassing module</b>	<p>The free-standing units in the KBF PRO series can be retrofitted with a CO<sub>2</sub> gassing module. Control ranges 0-1 vol.-% CO<sub>2</sub> for plants or 0-20 vol.-%CO<sub>2</sub> for cell cultures.</p> <p><b>KBF PRO 260, 470, 720, 1060, 1600</b></p>	
<b>Water treatment</b>	<p>BINDER PURE AQUA Service for the treatment or demineralization of tap water for the humidification systems of BINDER climate chambers. The complete set containing PURE AQUA 300 single-use cartridge, measuring device, and all necessary connecting parts.</p>	
<b>Services</b>	<p>You can access our installation, maintenance, calibration, validation, or warranty services by taking out a Maintenance Service Agreement or by simply getting in touch when you need us. More information is available in the accessories and services chapter.</p>	
<b>BINDER Customized Solutions</b>	<p>Using a BINDER series production product as a basis, we develop individual solutions as a single unit or in small batches. All products are tested, certified, and supplied with a full functional guarantee and warranty. More information is available in the accessories and services chapter.</p>	

► All extras online [go2binder.com/us](https://go2binder.com/us)

## TECHNICAL DATA

Data						
Designation	KBF PRO 130	KBF PRO 260	KBF PRO 470	KBF PRO 720	KBF PRO 1060	KBF PRO 1600
Option model	Standard	Standard	Standard	Standard	Standard	Standard
Performance Data Temperature						
Temperature range	-20...100 °C	-20...100 °C	-20...100 °C	-20...100 °C	-20...100 °C	-20...100 °C
Max. heat compensation at 40°C	450 W	800 W	800 W	1,000 W	1,000 W	1,000 W
Performance Data Climate						
Temperature range with humidity	10...90 °C	10...90 °C	10...90 °C	10...90 °C	10...90 °C	10...90 °C
Humidity range	10...98 % r.F.	10...98 % r.F.	10...98 % r.F.	10...98 % r.F.	10...98 % r.F.	10...98 % r.F.
Temperature uniformity at 25°C and 60% RH	0.2 ± K	0.2 ± K	0.3 ± K	0.3 ± K	0.3 ± K	0.3 ± K
Temperature uniformity at 40°C and 75% RH	0.2 ± K	0.2 ± K	0.3 ± K	0.3 ± K	0.3 ± K	0.3 ± K
Temperature fluctuation at 25°C and 60% RH	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K
Temperature fluctuation at 40°C and 75% RH	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K	0.1 ± K
Humidity fluctuation at 25°C and 60% RH	1 ± % r.F.	1 ± % r.F.	1 ± % r.F.	1 ± % r.F.	1 ± % r.F.	1 ± % r.F.
Humidity fluctuation at 40°C and 75% RH	1 ± % r.F.	1 ± % r.F.	1 ± % r.F.	1 ± % r.F.	1 ± % r.F.	1 ± % r.F.
Recovery time after door was opened for 30 s at 25°C and 60% RH	1 min	1 min	1 min	1 min	1 min	1 min
Recovery time after door was opened for 30 s at 40°C and 75% RH	3 min	3 min	4 min	5 min	5 min	5 min
Electrical data						
Rated Voltage	208...240 V	208...240 V		208...240 V	208...240 V	208...240 V
Power frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Nominal power	1,9 kW	1,6 kW	1,6 kW	1,8 kW	1,9 kW	1,9 kW
Unit fuse	16,0 A	16,0 A	16,0 A	16,0 A	16,0 A	16,0 A
Phase (Nominal voltage)	1~	1~	1~	1~	1~	1~
Dimensions and weights						
Interior volume	4 cu.ft	9 cu.ft	17 cu.ft	26 cu.ft	38 cu.ft	57 cu.ft
Net weight of the unit (empty)	313 lbs	434 lbs	549 lbs	688 lbs	794 lbs	992 lbs
Load per rack	55 lbs	66 lbs	88 lbs	88 lbs	88 lbs	88 lbs
Permitted load	110 lbs	198 lbs	198 lbs	220 lbs	220 lbs	220 lbs
Wall clearance back	3,94 in	3,94 in	3,94 in	7,09 in	7,09 in	7,09 in
Wall clearance sidewise	3,94 in	7,09 in	7,09 in	7,09 in	7,09 in	7,09 in
Housing dimensions not incl. fittings and connections						
Width net	35.43 in	36.61 in	36.61 in	50.59 in	50.59 in	70.67 in
Height net	39.57 in	54.96 in	76.81 in	76.81 in	76.81 in	76.81 in
Depth net	27.95 in	35.43 in	35.43 in	35.43 in	46.26 in	46.26 in
Internal Dimensions						
Interior width	25.83 in	25.83 in	25.83 in	39.8 in	39.8 in	59.88 in
Interior height	19.69 in	27.36 in	49.21 in	49.21 in	49.21 in	49.21 in
Interior depth	15.2 in	22.64 in	22.64 in	22.64 in	33.35 in	33.35 in


Inner doors	1	1	1	2	2	2
Unit doors	1	1	1	2	2	2
Environment-specific data						
Sound-pressure level at 25°C and 60% RH	46 dB(A)	48 dB(A)	50 dB(A)	50 dB(A)	50 dB(A)	52 dB(A)
Fixtures						
Number of shelves (std./ max.)	2/6	2/9	2/16	2/16	2/16	2/16

## ORDERING INFORMATION

Interior volume		Power supply - unit fuse	Plug*	Version	Model version	Art.-No.
[cu.ft.]	[L]					
Model KBF PRO 130						
4	127	208...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFPRO130-230V	9020-0439
Model KBF PRO 260						
9	262	208...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFPRO260-230V	9020-0440
Model KBF PRO 470						
17	472	208...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFPRO470-230V	9020-0441
Model KBF PRO 720						
26	727	208...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFPRO720-230V	9020-0442
Model KBF PRO 1060						
38	1,070	208...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFPRO1060-230V	9020-0443
Model KBF PRO 1600						
57	1,610	208...240 V 1~ 50/60 Hz -16,0 A	CEE 7/7	Standard	KBFPRO1600-230V	9020-0444


## EXTRACT OF FULFILLED STANDARDS

- ICH Q1A(R2)

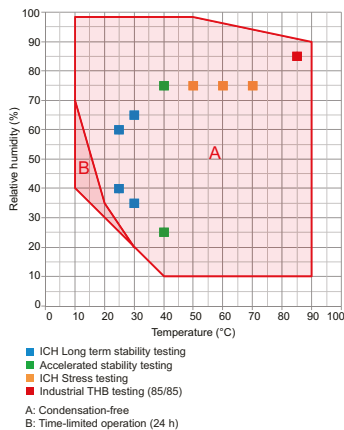


## DIMENSIONS AND WEIGHTS


KBF PRO 130

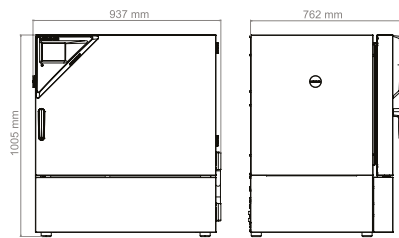


KBF PRO 260

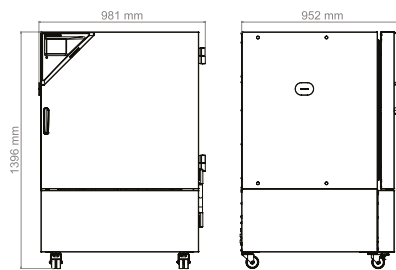


KBF PRO 470

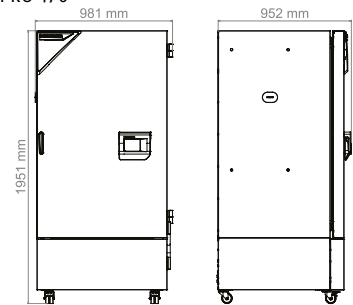


KBF PRO 720

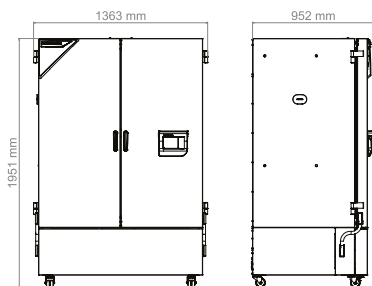

KBF PRO 1060

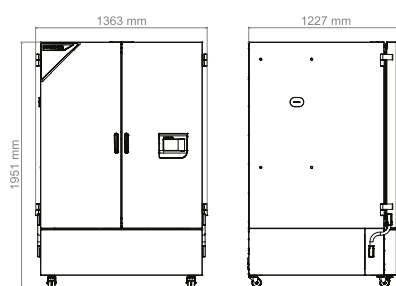

KBF PRO 1600

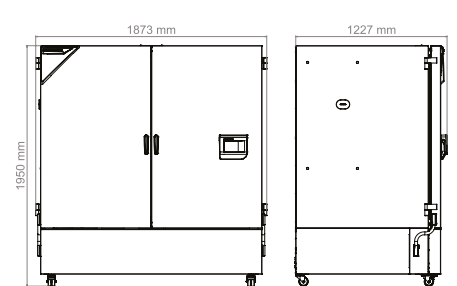

## OPTIONS

Designation	Description	KBF PRO 130	KBF PRO 260	KBF PRO 470	KBF PRO 720	KBF PRO 1060	KBF PRO 1600	*	Art.-No.
Access port with silicone plug	left								
	30 mm	•	•	•	•	•	•	01	8012-2489
	50 mm	•	•	•	•	•	•	01	8012-2490
	100 mm	–	•	•	•	•	•	01	8012-2491
	right								
	30 mm	•	•	•	•	•	•	01	8012-2492
	50 mm	•	•	•	•	•	•	01	8012-2493
	100 mm	–	•	•	•	•	•	01	8012-2494
	top								
	30 mm	•	•	•	•	•	•	01	8012-2500
	50 mm	•	•	•	•	•	•	01	8012-2495
	100 mm	•	•	•	•	•	•	01	8012-2496
Alarm	Accessible via 3-pin clamping sleeve (max. 24 V - 2.5 A), with acoustic signal that can be switched off	•	•	•	•	•	•	–	8012-2504
Analog output 4-20 mA	for temperature and humidity values (output not adjustable)	•	•	•	•	•	•	–	8012-2375
Calibration certificate, expanded	for temperature and humidity; for extending the measurement in center of chamber to include another test value	•	•	•	•	•	•	–	8012-2576

Designation	Description	KBF PRO 130	KBF PRO 260	KBF PRO 470	KBF PRO 720	KBF PRO 1060	KBF PRO 1600	*	Art.-No.
Calibration certificate, temperature	temperature measurement incl. certificate, 9 measuring points at specified temperature	•	•	•	•	•	•	-	8012-2379
	temperature measurement incl. certificate, 15- 18 measuring points at specified temperature	•	•	•	•	•	•	-	8012-2383
	temperature measurement incl. certificate and 27 measuring points at specified temperature	•	•	•	•	•	•	-	8012-2427
Calibration certificate, temperature and humidity	Measurement in center of chamber at 25°C / 60% RH or at specified test values	•	•	•	•	•	•	-	8012-2438
	temperature (according to DIN12880) and humidity measurement incl. certificate, 27 temperature measuring points and 1 humidity measuring point, at 25 °C / 60 % RH or at specified values	•	•	•	•	•	•	-	8012-2578
Coated heat exchanger	For preventing damage to the aluminum heat exchanger caused by corrosive sample material	•	-	-	-	-	-	-	8012-2582
		-	•	-	-	-	-	-	8012-2583
		-	-	•	-	-	-	-	8012-2584
		-	-	-	•	•	-	-	8012-2585
		-	-	-	-	-	•	-	8012-2586
Door lock	lockable door handle	•	•	•	•	-	-	-	8012-2538
		-	-	-	-	•	•	-	8012-2539
Door lock, electromechanical	can be opened with PIN code via controller	•	•	•	-	-	-	-	8012-2540
		-	-	-	•	•	•	-	8012-2590
Inner chamber, reinforced	max. total load 100 kg	•	-	-	-	-	-	-	8012-2524
	max. total load 180 kg	-	•	-	-	-	-	-	8012-2525
		-	-	•	-	-	-	-	8012-2526
	max. total load 200 kg	-	-	-	•	-	-	-	8012-2527
		-	-	-	-	•	-	-	8012-2528
Interior lighting	With climate-resistant LEDs, switches when the unit door is opened	•	•	•	-	-	-	-	8012-2562
		-	-	-	•	•	-	-	8012-2566
		-	-	-	-	-	•	-	8012-2570
Shipping pallet	with unloading ramp for installing unit without forklift	-	•	•	•	•	•	-	8012-2548
Specimen temperature display	Flexible Pt 100 indoor temperature sensor, for object temperature display or control	•	•	•	•	•	•	-	8012-2554
Swivel casters, height-adjustable	For horizontal alignment of the unit on uneven floors	-	•	•	•	•	•	-	8012-2544

## ACCESSORIES

Designation	Description	KBF PRO 130	KBF PRO 260	KBF PRO 470	KBF PRO 720	KBF PRO 1060	KBF PRO 1600	*	Art.-No.
APT-COM™ 4 GLP-Edition	for working under GLP-compliant conditions. Measured values are documented in a tamper-proof way in line with the requirements of FDA Regulation 21 CFR 11.								
	version 4, GLP edition	•	•	•	•	•	•	-	9053-0042
APT-COM™ 4 PROFESSIONAL-Edition	convenient unit and user management built on the BASIC edition. Suitable for networking up to 100 units.								
	version 4, PROFESSIONAL edition	•	•	•	•	•	•	-	9053-0040
Base	With swivel casters, for mobile installation or leveling of the unit or stack of units	•	–	–	–	–	–	-	9051-0045
BINDER PURE AQUA SERVICE	System for preparation or complete desalination of tap water, complete set containing PURE AQUA 300 single-use cartridge, measuring device, and all necessary connecting parts	•	•	•	•	•	•	-	8012-0759
BINDER PURE AQUA SERVICE, accessories	Single-use, replacement cartridge for BINDER PURE AQUA System	•	•	•	•	•	•	-	6011-0165
Coated heat exchanger	For preventing damage to the aluminum heat exchanger caused by corrosive sample material	–	–	–	–	–	•	-	8012-2586
Converter, voltage	to operate the device at a nominal voltage of 120 V 1 ph 60 Hz								
	240 V option model	•	•	•	•	•	•	-	8009-0821
CO <sub>2</sub> gassing module	BINDER CO <sub>2</sub> gassing module 0-1%, with NDIR CO <sub>2</sub> sensor and analog output 4-20 mA	–	•	•	•	•	•	-	8012-2140
	BINDER CO <sub>2</sub> gassing module 0-20%, with NDIR CO <sub>2</sub> sensor and analog output 4-20 mA	–	•	•	•	•	•	-	8012-2138
Door lock	lockable door handle	–	–	–	–	–	•	-	8012-2539
Door lock, electromechanical	can be opened with PIN code via controller	–	–	–	–	–	•	-	8012-2590
ICH light module	BINDER ICH-Q1B light module consisting of a VIS cassette and a UVA cassette as well as an independent power supply	–	•	•	–	–	–	-	8012-2441
		–	–	–	•	–	–	-	8012-2442
	BINDER ICH-Q1B light module with light-dose control consisting of a VIS cassette, a UVA cassette, a spherical VIA sensor, a spherical UVA sensor as well as an independent power supply	–	•	•	–	–	–	-	8012-2443
		–	–	–	•	–	–	-	8012-2444
Interior lighting	With climate-resistant LEDs, switches when the unit door is opened	–	–	–	–	–	•	-	8012-2570

Designation	Description	KBF PRO 130	KBF PRO 260	KBF PRO 470	KBF PRO 720	KBF PRO 1060	KBF PRO 1600	*	Art.-No.
LED light bars	Basic set consisting of 2 pieces, attachment material, control unit for max. 4 light strips, 100-240 V, 50/60 Hz								
	Basic set 300, length 30 cm	•	•	•	–	–	–	-	8012-1107
	Basic set 500, length 50 cm	•	•	•	•	•	•	-	8012-1108
	Basic set 900, length 90 cm	–	–	–	•	•	•	-	8012-1109
	Expansion set consisting of 2 pieces, attachment material: clips. For expanding the basic set of light bars								
	Expansion set 300, length 30 cm	•	•	•	–	–	–	-	8012-1716
	Expansion set 500, length 50 cm	•	•	•	•	•	•	-	8012-1717
	Expansion set 900, length 90 cm	–	–	–	•	•	•	-	8012-1718
Light module for plants	BINDER LED plant light module consisting of 16 LED strip lights, 3-channel controller and fresh air pump as well as independent power supply	–	•	•	•	•	•	-	8012-2439
pH-neutral detergent	concentrated, for gentle remove of residual contaminants; 1 kg	•	•	•	•	•	•	-	8012-2250
Qualification documents	IQ/OQ/PQ documents – supporting documents for validation performed by customers, according to customer requirements, PQ section added to qualification folder IQ/OQ; parameters: temperature and humidity values								
	Digital in PDF format	•	•	•	•	•	•	-	7057-0006
	Hard copy inside folder	•	•	•	•	•	•	-	7007-0006
	IQ/OQ documents – supporting documents for validation performed by customers, consisting of: IQ/OQ check-lists incl. calibration guide and comprehensive unit documentation; parameters: temperature and humidity values								
	Digital in PDF format	•	•	•	•	•	•	-	7057-0002
	Hard copy inside folder	•	•	•	•	•	•	-	7007-0002

Designation	Description	KBF PRO 130	KBF PRO 260	KBF PRO 470	KBF PRO 720	KBF PRO 1060	KBF PRO 1600	*	Art.-No.
Shelves	Shelf rack in set with pair of retaining rails (U rails), made entirely of stainless steel								
	Load-bearing capacity 25 kg	•	–	–	–	–	–	–	8012-2389
		•	–	–	–	–	–	–	8012-2406
		–	•	•	–	–	–	–	8012-2384
		–	•	•	–	–	–	–	8012-2390
		–	•	•	–	–	–	–	8012-2407
		–	–	–	•	–	–	–	8012-2385
	Load-bearing capacity 40 kg	–	–	–	•	–	–	–	8012-2391
		–	–	–	•	–	–	–	8012-2408
		–	–	–	–	•	–	–	8012-2386
		–	–	–	–	•	–	–	8012-2392
		–	–	–	–	•	–	–	8012-2409
		–	–	–	–	–	•	–	8012-2387
		–	–	–	–	–	•	–	8012-2393
		–	–	–	–	–	•	–	8012-2410
	Load-bearing capacity 50 kg	•	–	–	–	–	–	–	8012-2412
		–	•	•	–	–	–	–	8012-2413
	Load-bearing capacity 80 kg	–	–	–	•	–	–	–	8012-2414
		–	–	–	–	•	–	–	8012-2415
Shipping pallet	with unloading ramp for installing unit without forklift	–	–	–	–	–	•	–	8012-2548
Stacking adapter	For safe stacking of two identical units	•	–	–	–	–	–	–	9051-0048
Swivel casters, height-adjustable	For horizontal alignment of the unit on uneven floors	–	–	–	–	–	•	–	8012-2544
Water supply	External, free-standing, set consisting of 20-liter fresh water canister with pump and level sensor and 20-liter waste water canister	•	•	•	•	•	•	–	8012-2592

## SERVICES

Designation	Description	*	Art.-No.
1-year warranty extension	The warranty is extended by 1 year from the delivery date, wear parts are excluded	–	DL50-0030
BRONZE 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate. 10% Discount on Spare Parts and Labor for any additional Services needed Wear + tear parts to be purchased or billed to customer. Travel to be quoted as separate.	–	DL20-0710
Execution of IQ/OQ	Execution of IQ/OQ in accordance with qualification folder. Travel to be quoted separate.	–	DL42-0300
Execution of IQ/OQ/PQ	Execution of IQ/OQ/PQ in accordance with qualification folder. Travel to be quoted separate.	–	DL44-0500
GOLD 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate of both Temperature and Humidity. 25% Discount on Spare Parts and Labor for any additional Services needed. One additional courtesy visit per year can be used for service visit or operator. Wear + tear parts to be purchased or billed to customer. Travel to be quoted separate.	–	DL20-0920
Preventive maintenance	One-off maintenance service in accordance with maintenance schedule. Visual inspection of mechanical and electrical components, testing of all key functions. Checking a test temperature specified by the user in center of usable space without certificate. Wear + tear parts need to be purchased or billed to customer. Travel to be quoted as separate.	–	DL20-0613



Designation	Description	*	Art.-No.
SILVER 3-year maintenance contract	Annual Device Inspection Includes Preventive Maintenance with Calibration Certificate 15% Discount on Spare Parts and Labor for any additional Services needed One additional courtesy visit per year can be used for service visit or operator training. Wear + tear parts to be purchased or billed to customer. Travel to be quoted separate.	-	DL20-0820
Temperature and humidity calibration	Expansion –Additional Temperature and humidity calibration with 1 measuring point in center of chamber with 1 specified pair of values, including certificate. Travel to be quoted separate.	-	DL30-0302
	Temperature and humidity calibration with 1 measuring point in center of chamber with 1 specified pair of values, including certificate. Travel to be quoted separate.	-	DL30-0340
Temperature measurement, 9 temperature measuring points and 1 humidity measuring point	Temperature measurement with 9 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 3 shelves are required.	-	DL30-0309
Temperature measurement, 18 temperature measuring points and 1 humidity measuring point	Temperature measurement with 18 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 2 shelves are required.	-	DL30-0318
Temperature measurement, 27 temperature measuring points and 1 humidity measuring point	Temperature measurement with 27 temperature measuring points and 1 humidity measuring point in center of chamber with a pair of values specified by the user, including certificate. Travel to be quoted separate. A total of 3 shelves are required.	-	DL30-0327
Unit installation	Connect the unit to the customer-side connections (electricity, water, wastewater, gas), basic functions check, brief operating instructions. (excl.: unpacking, setup, controller instructions, programming, installation work) Travel to be quoted as separate.	-	DL10-0300
Unit instructions	Instruction regarding operating principle and basic functions of the unit, operation of the control electronics including programming. Travel to be quoted as separate Limited to 3 hours.	05	DL10-0700

# BINDER products

CO<sub>2</sub> incubators

Standard Incubators

Cooling incubators

Growth chambers

Ultralow temperature freezers

Drying and heating chambers

Safety drying chambers

Vacuum drying chambers

Humidity test chambers

Dynamic climate chambers

Battery test chambers

Walk-in-chambers

Multi Management Software



Never miss a product novelty -  
Subscribe and keep up to speed with  
the BINDER monthly newsletter.

**Subscription**

[go2binder.com/en-newsletter-subscription](https://go2binder.com/en-newsletter-subscription)



Best conditions for your success

**BINDER GmbH**  
Tuttlingen, Germany

Tel +49 7462 2005 0  
[info@binder-world.com](mailto:info@binder-world.com)  
[www.binder-world.com](http://www.binder-world.com)

**BINDER Asia Pacific (Hong Kong) Ltd.**  
Kowloon, Hong Kong, P.R. China

Tel +852 39070500  
[asia@binder-world.com](mailto:asia@binder-world.com)

**BINDER Environmental Testing  
Equipment (Shanghai) Co., Ltd.**  
Shanghai, P.R.China

Tel +86 21 685 808 25  
[china@binder-world.com](mailto:china@binder-world.com)

**BINDER Inc.**  
Bohemia, NY, USA

Tel +1 631 224 4340  
[usa@binder-world.com](mailto:usa@binder-world.com)